



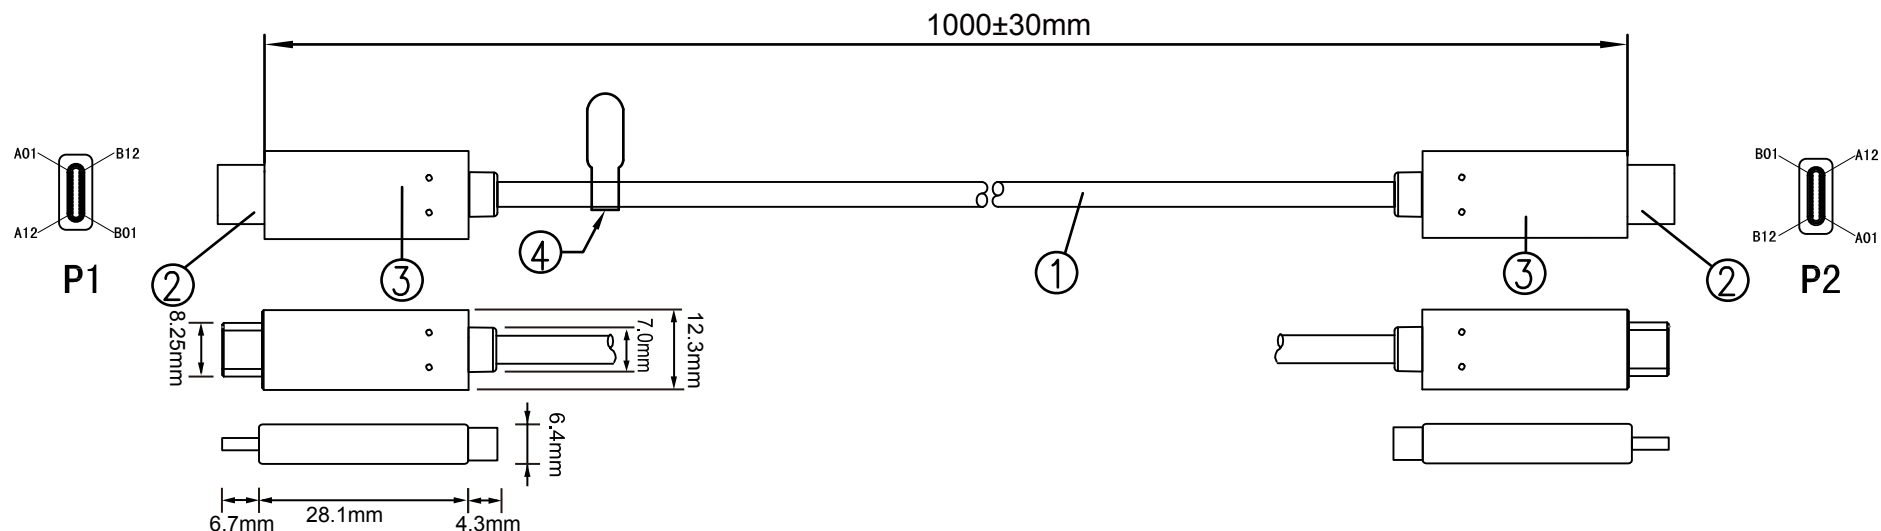

PIN ASSIGNMENT:

USB C TYPE(P1)	USB C TYPE(P2)
A5	A5 cc
B5	PWR_Vbus1 [PWR_Vbus2] B5
A6	A6 Dp1
A7	A7 Dn1
A2	B11 SSRX p1
A3	B10 SSRX n1
B11	A2 SSRX p1
B10	A3 SSRX n1
B2	A11 SSRX p2
B3	A10 SSRXn2
A11	B2 SSTX p2
A10	B3 SSTX n2
A8	B8 SBU 2
B8	A8 SBU 1
A1,B1,A12,B12	A1,B1,A12,B12 GND
A4,B4,A9,B9	A4,B4,A9,B9 Vbus
SHELL	SHELL

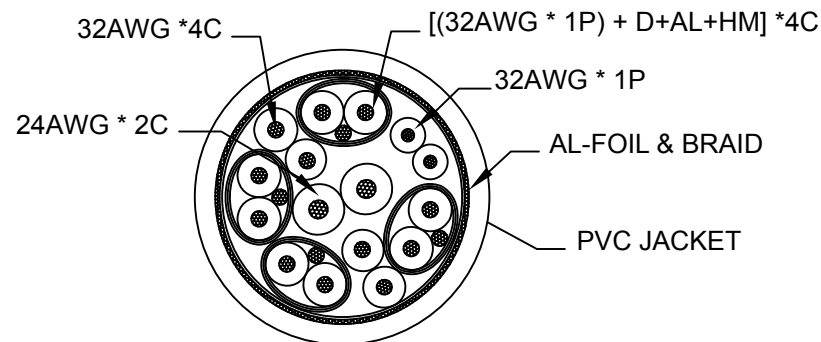

NOTE:

- 1.TESTING:100% OPEN AND SHORT TEST
- 2.TESTING: 100% E-MARKER INFORMATION TEST
- 3.MONITOR AND PC 4K60HZ TEST
- 4.ALL MATERIAL BE ROHS COMPLIANT

④	TAG	1PCS	DELTACO TAG
③	HOOD MOLD	2PCS	WHITE PVC
②	USB3.1 TYPE C M	2PCS	NICKEL PLATED SHELL
①	CABLE	1PCS	(32AWG*1P+D+AL+HM)*4C+32AWG*1P+32AWG*4C +24AWG*2C+AEB OD:4.5 ±0.2mm WHITE PVC JACKET
NO.	PARTS NAME	Q'TY	SPECIFICATION

APPROVED	CHECKED	DRAWN	CUSTOMER:	
			ITEM NO.	USBC-1059M
			DRAW NO.	
			UNIT	mm
			SCALE	NONE

DESCRIPTION:

USB 3.1 USB-C MALE/
USB-C MALE Gen1 3A
E-MARKER CHIPSET

